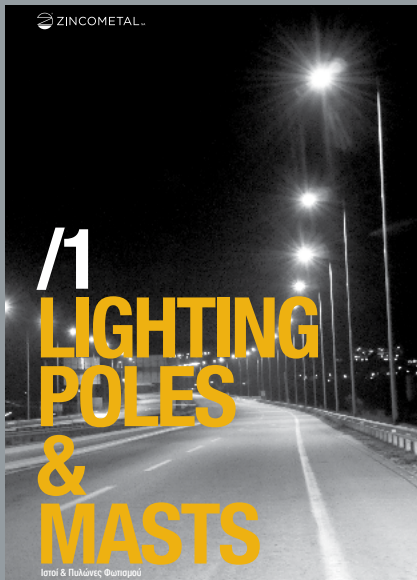


PRINTED CATALOGUE



WEBSITE LINK

[/ products / lighting poles & masts / street lighting poles](#)

PRODUCT NO:

DESCRIPTION:

IMAGE

round conical of
conicity 14mm/m



ZINCOMETAL S.A. is constantly developing and improving its products. For this reason, all product descriptions in this catalogue are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. Regarding the validity of the International Standards it is considered always the oldest edition.

Stay tuned with the company by signing up in ZINCOMETAL's Newsletter (www.zincometal.gr) and Social Media.

1.1.3. Round Conical of conicity 14mm/m

Image 1

Outdoor lighting for the official dealer of Porsche in Bulgaria.

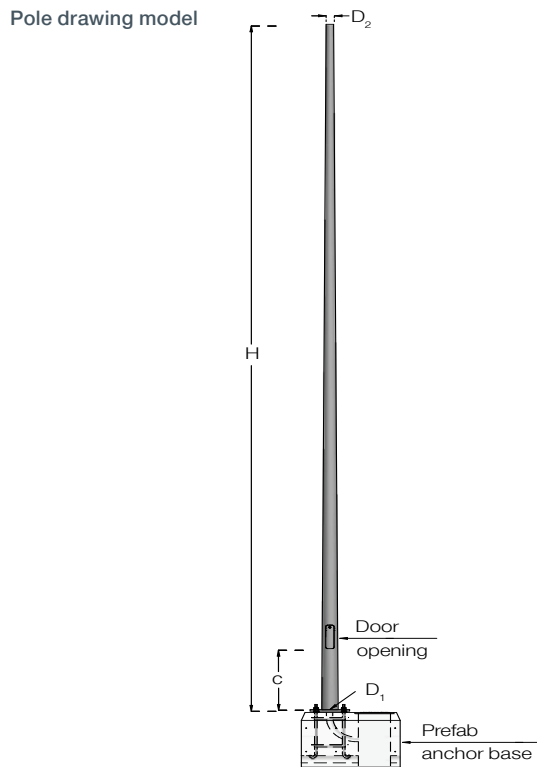


Image 2

Round conical steel lighting poles with base plate, hot-dip galvanized and electrostatic powder coating surface finish (duplex system), in combination with an urban lighting luminaire ZINLUX ASTRA.



Round Conical of conicity 14mm/m

With base plate

Material Hot rolled steel grade S235JR according to EN 10025.

Surface protection Hot-dip galvanized (in bath with bigger length than the pole) according to International Standard EN ISO 1461.

Manufacturing Round conical steel pole is made from steel sheet bend in special machines on regular circle profile with constant taper. Consisting from one (1) single piece for a pole height of up to 12.00m. The lighting pole, up to 12.00m, is welded across with only one stitch in automatic welding machines MIG (longitudinal welding). For a better static analysis there is a base plate with or without triangular gussets (depends on the headload). Door opening is made from the body of the pole through special saw machine (IP54 and IK10). It fits tightly and it's equipped with security lock with stainless screw and security key ZINCOMETAL of triangular socket which is easy to use. Manufacturing according to EN 40.

Certifications CE Certificate of Notified European Body (EN 40, European Commission).

Attached information Headload capacity tables for street lighting poles (see Appendix A).

Table of Round Conical Poles of conicity 14mm/m

With base plate

Table 1 of 2

| | | | | | | | | | Anchor base | | | Junction box |
|----------|------|----|------|-----|------------|--------|-----|-----|------------------|---------|---------|---------------|
| Code | mm | mm | mm | mm | mm | mm | mm | kg | Code | mm | mm | Code |
| CCF303T | 3000 | 3 | Ø102 | Ø60 | 310x310x10 | 300x62 | 600 | 27 | BAG M16/50/Z/235 | M16x500 | 235x235 | A-M3 |
| CCF303T1 | | | Ø118 | Ø76 | | | | 31 | | | | A-M1 |
| CCF304T | 4000 | 3 | Ø116 | Ø60 | 310x310x10 | 300x62 | 600 | 36 | BAG M16/50/Z/235 | M16x500 | 235x235 | A-M3 |
| CCF404T | | 4 | | | | | | 46 | | | | A-M1 |
| CCF304T1 | | 3 | Ø132 | Ø76 | | | | 40 | | | | A-M3A |
| CCF404T1 | | 4 | | | | | | 52 | | | | A-M2 |
| CCF305T | 5000 | 3 | Ø130 | Ø60 | 310x310x10 | 300x63 | 600 | 46 | BAG M16/50/Z/235 | M16x500 | 235x235 | A-M3A A-M2 |
| CCF405T | | 4 | | | | | | 58 | | | | |
| CCF305T1 | | 3 | Ø146 | Ø76 | | 300x75 | | 49 | | | | |
| CCF405T1 | | 4 | | | | | | 62 | | | | |
| CCF306T | 6000 | 3 | Ø144 | Ø60 | 400x400x10 | 300x75 | 800 | 61 | BAG M20/60/Z/280 | M20x600 | 280x280 | A-M3A |
| CCF406T | | 4 | | | | | | 77 | | | | A-M2 |
| CCF306T1 | | 3 | Ø160 | Ø76 | | 300x85 | | 68 | | | | A-M4 |
| CCF406T1 | | 4 | | | | | | 86 | | | | A-M3A |
| CCF307T | 6800 | 3 | Ø155 | Ø60 | 400x400x12 | 300x85 | 800 | 76 | BAG M20/60/Z/280 | M20x600 | 280x280 | A-M4 A-M3A |
| CCF407T | | 4 | | | | | | 96 | | | | |
| CCF307T1 | | 3 | Ø170 | Ø76 | | | | 84 | | | | |
| CCF407T1 | | 4 | | | | | | 107 | | | | |
| CCF308T | 7800 | 3 | Ø170 | Ø60 | 400x400x12 | 300x85 | 800 | 87 | BAG M24/75/Z/280 | M24x750 | 280x280 | A-M4 A-M3A |
| CCF408T | | 4 | | | | | | 110 | | | | |
| CCF308T1 | | 3 | Ø185 | Ø76 | | | | 97 | | | | |
| CCF408T1 | | 4 | | | | | | 123 | | | | |
| CCF308T2 | | 3 | Ø200 | Ø90 | | | | 106 | | | | |

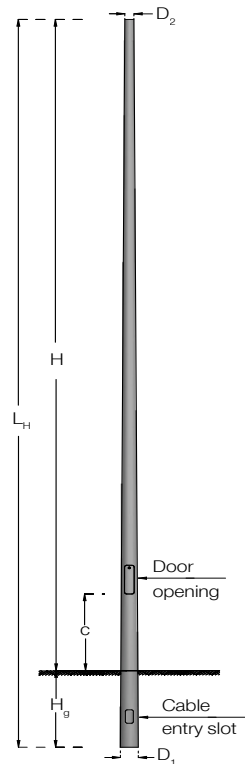
Table 2 of 2

| | | | | | | | | | Anchor base | | Junction box | |
|----------|-------|----|------|-----|------------|--------|-----|-----|-------------------------|---------|--------------|---------------|
| Code | mm | mm | mm | mm | mm | mm | mm | kg | Code | mm | mm | Code |
| CCF408T2 | 7800 | 4 | Ø200 | Ø90 | 400x400x12 | 300x85 | 800 | 135 | BAG M24/75/Z/280 | M24x750 | 280x280 | A-M4 A-M3A |
| CCF309T | 8800 | 3 | Ø183 | Ø60 | 400x400x15 | 300x85 | 800 | 106 | BAG M24/75/Z/280 | M24x750 | 280x280 | A-M4 A-M3A |
| CCF409T | | 4 | | | | | | 135 | | | | |
| CCF309T1 | | 3 | Ø200 | Ø76 | | | | 119 | | | | |
| CCF409T1 | | 4 | | | | | | 148 | | | | |
| CCF309T2 | | 3 | Ø213 | Ø90 | | | | 126 | | | | |
| CCF409T2 | | 4 | | | | | | 160 | | | | |
| CCF310T | 9800 | 3 | Ø197 | Ø60 | 400x400x15 | 300x85 | 800 | 120 | BAG M24/75/Z/280 | M24x750 | 280x280 | A-M4 A-M3A |
| CCF410T | | 4 | | | | | | 152 | | | | |
| CCF310T1 | | 3 | Ø213 | Ø76 | | | | 133 | | | | |
| CCF410T1 | | 4 | | | | | | 170 | | | | |
| CCF310T2 | | 3 | Ø227 | Ø90 | | | | 143 | | | | |
| CCF410T2 | | 4 | | | | | | 183 | | | | |
| CCF312T | 11800 | 3 | Ø225 | Ø60 | 400x400x20 | 300x85 | 800 | 160 | BAG M24/75/Z/280 | M24x750 | 280x280 | A-M4 A-M3A |
| CCF412T | | 4 | | | | | | 200 | | | | |
| CCF312T1 | | 3 | Ø240 | Ø76 | | | | 172 | | | | |
| CCF412T1 | | 4 | | | | | | 220 | | | | |
| CCF312T2 | | 3 | Ø255 | Ø90 | | | | 185 | | | | |
| CCF412T2 | | 4 | | | | | | 237 | | | | |
| CCF313T | 12800 | 3 | Ø240 | Ø60 | 400x400x20 | 300x85 | 800 | 176 | BAG M24/75/Z/280 | M24x750 | 280x280 | A-M4 A-M3A |
| CCF413T | | 4 | | | | | | 234 | | | | |
| CCF313T1 | | 3 | Ø255 | Ø76 | | | | 192 | | | | |
| CCF413T1 | | 4 | | | | | | 245 | | | | |
| CCF313T2 | | 3 | Ø270 | Ø90 | | | | 206 | | | | |
| CCF413T2 | | 4 | | | | | | 263 | | | | |

Round Conical of conicity 14mm/m

Root mounted

Pole drawing model



Material Hot rolled steel grade S235JR according to EN 10025.

Surface protection Hot-dip galvanized (in bath with bigger length than the pole) according to International Standard EN ISO 1461.

Manufacturing Round conical steel pole is made from steel sheet bend in special machines on regular circle profile with constant taper. Consisting from one (1) single piece for a pole height of up to 12.00m. The lighting pole, up to 12.00m, is welded across with only one stitch in automatic welding machines MIG (longitudinal welding). Door opening is made from the body of the pole through special saw machine (IP54 and IK10). It fits tightly and it's equipped with security lock with stainless screw and security key ZINCOMETAL of triangular socket which is easy to use. It is provided with cable entry slot. Manufacturing according to EN 40.

Certifications CE Certificate of Notified European Body (EN 40, European Commission).

Attached information Headload capacity tables for street lighting poles (see Appendix A).

Table of Round Conical Poles of conicity 14mm/m

Root mounted

Table 1 of 3













| |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | Junction box |
| Code | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | kg | Code |
| CCF3030 | 3000 | 2500 | 500 | 3 | Ø102 | Ø60 | 600 | 300x62 | 150x50 | 18 | A-M3 A-M1 | |
| CCF3030/1 | | | | | Ø118 | Ø76 | | | | 22 | | |
| CCF3035 | 3500 | 3000 | 500 | 3 | Ø109 | Ø60 | 600 | 300x62 | 150x50 | 22 | A-M3 A-M1 | |
| CCF3035/1 | | | | | Ø125 | Ø76 | | | | 27 | | |
| CCF3040 | 4000 | 3500 | 500 | 3 | Ø116 | Ø60 | 600 | 300x62 | 150x50 | 27 | A-M3 A-M1 | |
| CCF3040/1 | | | | | Ø132 | Ø76 | | | | 31 | | |
| CCF3045 | 4500 | 4000 | 500 | 3 | Ø123 | Ø60 | 600 | 300x75 | 150x50 | 31 | A-M3A A-M2 | |
| CCF4045 | | | | 4 | | | | | | 41 | | |
| CCF3045/1 | | | | 3 | 36 | | | | | | | |
| CCF4045/1 | | | | 4 | 48 | | | | | | | |
| CCF3055 | 5500 | 5000 | 500 | 3 | Ø137 | Ø60 | 600 | 300x75 | 150x50 | 41 | A-M3A A-M2 | |
| CCF4055 | | | | 4 | | | | | | 54 | | |
| CCF3055/1 | | | | 3 | 46 | | | | | | | |
| CCF4055/1 | | | | 4 | 64 | | | | | | | |
| CCF3060 | 6000 | 5500 | 500 | 3 | Ø144 | Ø60 | 600 | 300x75 | 150x50 | 45 | A-M3A A-M2 | |
| CCF4060 | | | | 4 | | | | | | 60 | | |
| CCF3060/1 | | | | 3 | 53 | | | | | | | |
| CCF4060/1 | | | | 4 | 71 | | | | | | | |
| CCF3068 | 6800 | 6000 | 800 | 3 | Ø155 | Ø60 | 800 | 300x75 | 150x50 | 55 | A-M3A A-M2 | |
| CCF4068 | | | | 4 | | | | 73 | | | | |
| CCF3068/1 | | | | 3 | 63 | | | | | | | |
| CCF4068/1 | | | | 4 | 84 | | | | | | | |

Table 2 of 3
























| |  |  |  |  |  |  |  |  |  |  |  | |
|-----------|---|---|---|---|---|---|---|---|---|---|---|-----|
| | | | | | | | | | | | Junction box | |
| Code | mm | mm | mm | mm | mm | mm | mm | mm | mm | kg | Code | |
| CCF3078 | 7800 | 6800 | 1000 | 3 | Ø170 | Ø60 | 800 | 300x80 | 150x50 | 67 | A-M4 A-M3A | |
| CCF4078 | | | | 4 | | | | | | 90 | | |
| CCF3078/1 | | | | 3 | Ø185 | Ø76 | | 300x85 | | 77 | | |
| CCF4078/1 | | | | 4 | | | | | | 102 | | |
| CCF3078/2 | | | | 3 | Ø200 | Ø90 | | | | 85 | | |
| CCF4078/2 | | | | 4 | | | | | | 114 | | |
| CCF3088 | 8800 | 7800 | 1000 | 3 | Ø183 | Ø60 | 800 | 300x85 | 150x50 | 80 | A-M4 A-M3A | |
| CCF4088 | | | | 4 | | | | | | 107 | | |
| CCF3088/1 | | | | 3 | Ø200 | Ø76 | | | | | | 91 |
| CCF4088/1 | | | | 4 | | | | | | | | 122 |
| CCF3088/2 | | | | 3 | Ø213 | Ø90 | | | | | | 100 |
| CCF4088/2 | | | | 4 | | | | | | | | 134 |
| CCF3098 | 9800 | 8800 | 1000 | 3 | Ø197 | Ø60 | 800 | 300x85 | 150x50 | 95 | A-M4 A-M3A | |
| CCF4098 | | | | 4 | | | | | | 126 | | |
| CCF3098/1 | | | | 3 | Ø213 | Ø76 | | | | | | 107 |
| CCF4098/1 | | | | 4 | | | | | | | | 143 |
| CCF3098/2 | | | | 3 | Ø227 | Ø90 | | | | | | 117 |
| CCF4098/2 | | | | 4 | | | | | | | | 156 |
| CCF3108 | 10800 | 9800 | 1000 | 3 | Ø212 | Ø60 | 800 | 300x85 | 150x50 | 111 | A-M4 A-M3A | |
| CCF4108 | | | | 4 | | | | | | 148 | | |
| CCF3108/1 | | | | 3 | Ø228 | Ø76 | | | | | | 124 |
| CC4108/1 | | | | 4 | | | | | | | | 165 |
| CCF3108/2 | | | | 3 | Ø241 | Ø90 | | | | | | 135 |
| CCF4108/2 | | | | 4 | | | | | | | | 180 |

Table 3 of 3

| |  |  |  |  |  |  |  |  |  |  |  |  |
|--------------|---|---|---|---|---|---|---|--|---|---|---|---|
| Junction box | | | | | | | | | | | | |
| Code | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | kg | Code |
| CCF3118 | 11800 | 10800 | 1000 | 3 | Ø285 | Ø60 | 800 | 300x85 | 150x50 | | 127 | A-M4 A-M3A |
| CCF4118 | | | | 4 | | | | | | | 169 | |
| CCF3118/1 | | | | 3 | Ø240 | Ø76 | | | | | 141 | |
| CCF4118/1 | | | | 4 | | | | | | | 188 | |
| CCF3118/2 | | | | 3 | Ø255 | Ø90 | | | | | 154 | |
| CCF4118/2 | | | | 4 | | | | | | | 205 | |
| CCF3128 | 12800 | 11800 | 1000 | 3 | Ø239 | Ø60 | 800 | 300x85 | 150x50 | | 144 | A-M4 A-M3A |
| CCF4128 | | | | 4 | | | | | | | 193 | |
| CCF3128/1 | | | | 3 | Ø255 | Ø76 | | | | | 160 | |
| CCF4128/1 | | | | 4 | | | | | | | 214 | |
| CCF3128/2 | | | | 3 | Ø270 | Ø90 | | | | | 175 | |
| CCF4128/2 | | | | 4 | | | | | | | 233 | |

Round Conical of conicity 14mm/m

With base plate

Table
Round Conical
of conicity 14mm/m
With base plate
(Table 1 of 2)

| Code | Zone I (36m/sec=129.6km/h) | | | | | | Zone II (30m/sec=108km/h) | | | | | |
|----------|----------------------------|---|---|---|---|---|---------------------------|---|---|---|---|---|
| | Luminaires | | | Floodlights (400W-0.21m ²) | | | Luminaires | | | Floodlights (400W-0.21m ²) | | |
| | 2 | 3 | 4 | 2 | 3 | 4 | 2 | 3 | 4 | 2 | 3 | 4 |
| CCF303T | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF303T1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF304T | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF404T | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF304T1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF404T1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF305T | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF405T | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF305T1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF405T1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF306T | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF406T | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF306T1 | v | v | v | v | - | - | v | v | v | v | v | v |
| CCF406T1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF307T | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF407T | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF307T1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF407T1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF308T | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF408T | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF308T1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF408T1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF308T2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF408T2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF309T | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF409T | v | v | v | v | v | - | v | v | v | v | v | v |

(Table 2 of 2)

| Code | Zone I (36m/sec=129.6km/h) | | | | | | Zone II (30m/sec=108km/h) | | | | | |
|----------|----------------------------|---|---|--|---|---|---------------------------|---|---|--|---|---|
| | Lumaires | | | Floodlights (400W-0.21m ²) | | | Lumaires | | | Floodlights (400W-0.21m ²) | | |
| | 2 | 3 | 4 | 2 | 3 | 4 | 2 | 3 | 4 | 2 | 3 | 4 |
| CCF309T1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF409T1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF309T2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF409T2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF310T | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF410T | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF310T1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF410T1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF310T2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF410T2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF312T | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF412T | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF312T1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF412T1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF312T2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF412T2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF313T | v | v | v | v | - | - | v | v | v | v | v | v |
| CCF413T | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF313T1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF413T1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF313T2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF413T2 | v | v | v | v | v | v | v | v | v | v | v | v |

Round Conical of conicity 14mm/m

Root mounted

Table
Round Conical
of conicity 14mm/m
Root mounted
(Table 1 of 2)

| Code | Zone I (36m/sec=129.6km/h) | | | | | | Zone II (30m/sec=108km/h) | | | | | |
|-----------|----------------------------|---|---|---|---|---|---------------------------|---|---|---|---|---|
| | Luminaires | | | Floodlights (400W-0.21m ²) | | | Luminaires | | | Floodlights (400W-0.21m ²) | | |
| | 2 | 3 | 4 | 2 | 3 | 4 | 2 | 3 | 4 | 2 | 3 | 4 |
| CCF3030 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF3030/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3035 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF3035/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3040 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF3040/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3045 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF4045 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3045/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF4045/1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3055 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF4055 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3055/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF4055/1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3060 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF4060 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3060/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF4060/1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3068 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF4068 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3068/1 | v | v | v | v | - | - | v | v | v | v | v | v |
| CCF4068/1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3078 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF4078 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3078/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF4078/1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3078/2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF4078/2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3088 | v | v | v | v | - | - | v | v | v | v | v | - |

(Table 2 of 2)

| Code | Zone I (36m/sec=129.6km/h) | | | | | | Zone II (30m/sec=108km/h) | | | | | |
|-----------|----------------------------|---|---|--|---|---|---------------------------|---|---|--|---|---|
| | Luminaires | | | Floodlights (400W-0.21m ²) | | | Luminaires | | | Floodlights (400W-0.21m ²) | | |
| | 2 | 3 | 4 | 2 | 3 | 4 | 2 | 3 | 4 | 2 | 3 | 4 |
| CCF4088 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3088/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF4088/1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3088/2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF4088/2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3098 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF4098 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3098/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF4098/1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3098/2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF4098/2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3108 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF4108 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3108/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CC4108/1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3108/2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF4108/2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3118 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF4118 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF3118/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF4118/1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3118/2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF4118/2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3128 | v | v | v | v | - | - | v | v | v | v | v | - |
| CCF4128 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3128/1 | v | v | v | v | v | - | v | v | v | v | v | v |
| CCF4128/1 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF3128/2 | v | v | v | v | v | v | v | v | v | v | v | v |
| CCF4128/2 | v | v | v | v | v | v | v | v | v | v | v | v |

Copyright © 2014 - All rights reserved ZINCOMETAL S.A.

All rights reserved.

Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.



www.zincometal.gr

Δ. 10ο χλμ. Κιλκίς-Πολυκάστρου
61100 Κιλκίς, τ.θ. 21
AD. 10th km. Kilkis - Polikastro
P.C. 61100 Kilkis, Greece

T. +30 23410 75651-3
+30 23410 71581
F. +30 23410 71734

E. info@zincometal.gr
WEB. www.zincometal.gr

zin
lux
lighting

The logo for Zin Lux Lighting consists of a stylized light fixture icon on the left, followed by the text "zin lux lighting" in a lowercase, sans-serif font.

hellenic griglia

The logo for Hellenic Griglia features a stylized grid icon on the left, followed by the text "hellenic griglia" in a lowercase, sans-serif font.