


PRINTED CATALOGUE

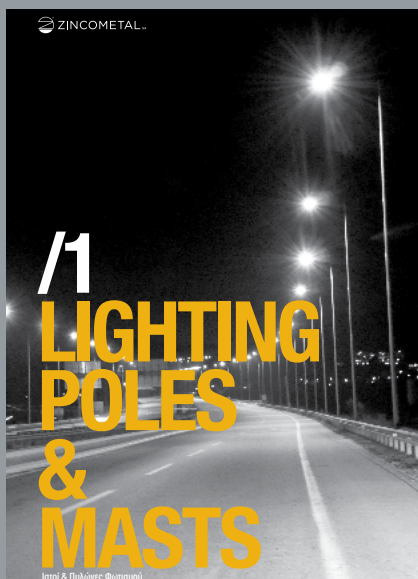

WEBSITE LINK

[/ products / lighting poles & masts / street lighting poles](#)

PRODUCT NO:

DESCRIPTION:

IMAGE

straight tubular poles



ZINCOMETAL S.A. is constantly developing and improving its products. For this reason, all product descriptions in this catalogue are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. Regarding the validity of the International Standards it is considered always the oldest edition.

Stay tuned with the company by signing up in ZINCOMETAL's Newsletter (www.zincometal.gr) and Social Media.

1.1.5. Straight Tubular Poles

Image 1

Straight tubular steel lighting pole with base plate, hot-dip galvanized and electrostatic powder coating surface finish (duplex system), in combination with an urban lighting luminaire ZINLUX PRISMA.



Image 2

Straight tubular steel lighting pole with base plate, with street lighting bracket and ZINLUX street lighting luminaire.

**Image 3**


Straight tubular steel lighting poles with base plate, with street lighting brackets and ZINLUX street lighting luminaires.



Straight Tubular Poles

3m-6m with base plate

Pole drawing model

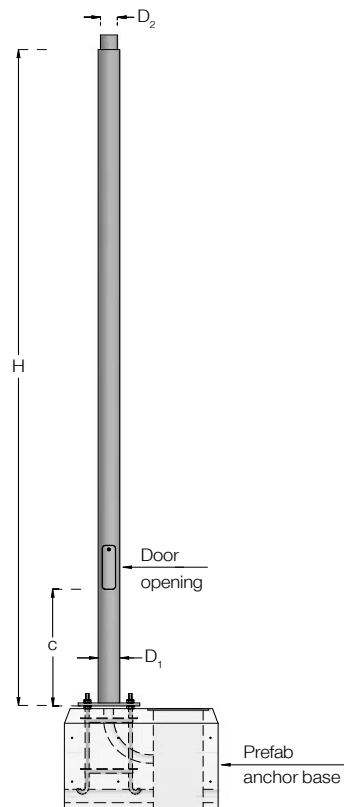

Material Steel tube from hot rolled steel grade S235JR according to EN 10025 manufactured to EN 10219.

Surface protection Hot-dip galvanized (in bath with bigger length than the pole) according to International Standard EN ISO 1461.

Manufacturing Cylindrical steel pole with top spigot $\Phi 60$ in order to suit lantern. For a better static analysis there is a base plate with or without triangular gussets (depends on the headload). Door opening is made from the body of the pole through special saw machine (IP54 and IK10). It fits tightly and it's equipped with security lock with stainless screw and security key ZINCOMETAL of triangular socket which is easy to use. Manufacturing according to EN 40.

Certifications CE Certificate of Notified European Body (EN 40, European Commission).

Table of Straight Tubular Poles


3m-6m with base plate

									Anchor base			Junction box
Code	mm	mm	mm	mm	mm	mm	mm	kg	Code	mm	mm	Code
ST-S 300/76T-60	3000	3	Ø76	Ø60	250x250x8	300x60	600	25	BAG M16/50/Z/190	M16x500	190x190	A-M1
ST-S 300/89T-60			Ø89			300x65		28				A-M3
ST-S 300/102T-60			Ø102			300x70		29				A-M1
ST-S 350/89T-60	3500	3	Ø89	Ø60	310x310x10	300x65	600	31	BAG M16/50/Z/235	M16x500	235x235	A-M3
ST-S 350/102T-60			Ø102			300x70		33				A-M1
ST-S 400/89T-60	4000	3	Ø89	Ø60	310x310x10	300x65	600	34	BAG M16/50/Z/235	M16x500	235x235	A-M3
ST-S 400/102T-60			Ø102			300x70		37				A-M1
ST-S 450/89T-60	4500	3	Ø89	Ø60	310x310x10	300x65	600	38	BAG M16/50/Z/235	M16x500	235x235	A-M3
ST-S 450/102T-60			Ø102			300x70		40				A-M1
ST-S 500/102T-60	5000	4	Ø102	Ø60	310x310x10	300x70	600	55	BAG M16/50/Z/235	M16x500	235x235	A-M3
ST-S 500/133T-60			Ø133			300x80		75				A-M1
ST-S 550/102T-60	5500	4	Ø102	Ø60	310x310x12	300x70	600	61	BAG M16/50/Z/235	M16x500	235x235	A-M3
ST-S 550/133T-60			Ø133			300x80		80				A-M1
ST-S 600/102T-60	6000	4	Ø102	Ø60	310x310x12	300x70	800	65	BAG M16/50/Z/235	M16x500	235x235	A-M3
ST-S 600/133T-60			Ø133			300x80		85				A-M1

Straight Tubular Poles

3m-6m root mounted

Pole drawing model

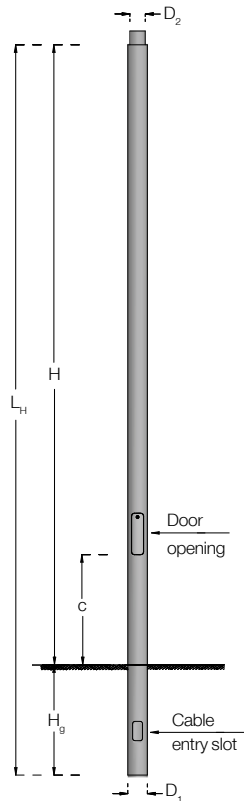

Material Steel tube from hot rolled steel grade S235JR according to EN 10025 manufactured to EN 10219.






Surface protection Hot-dip galvanized (in bath with bigger length than the pole) according to International Standard EN ISO 1461.

Manufacturing Cylindrical steel pole with top spigot $\Phi 60$ in order to suit lantern. Door opening is made from the body of the pole through special saw machine (IP54 and IK10). It fits tightly and it's equipped with security lock with stainless screw and security key ZINCOMETAL of triangular socket which is easy to use. It is provided with cable entry slot. Manufacturing according to EN 40.

Certifications CE Certificate of Notified European Body (EN 40, European Commission).

Table of Straight Tubular Poles

3m-6m root mounted

											
											Junction box
Code	mm	mm	mm	mm	mm	mm	mm	mm	kg	Code	
ST-S 350/76-60	3500	3000	500	3	Ø76	Ø60	300x60	150x50	25	A-M1	
ST-S 350/89-60					Ø89		300x65		28	A-M3	
ST-S 350/102-60					Ø102		300x70		29	A-M1	
ST-S 400/89-60	4000	3500	500	3	Ø89	Ø60	300x65	150x50	31	A-M3	
ST-S 400/102-60					Ø102		300x70		33	A-M1	
ST-S 450/89-60	4500	4000	500	3	Ø89	Ø60	300x65	150x50	34	A-M3	
ST-S 450/102-60					Ø102		300x70		37	A-M1	
ST-S 500/89-60	5000	4500	500	3	Ø89	Ø60	300x65	150x50	38	A-M3	
ST-S 500/102-60					Ø102		300x70		40	A-M1	
ST-S 550/102-60	5500	5000	500	4	Ø102	Ø60	300x70	150x50	55	A-M3 A-M1	
ST-S 550/133-60					Ø133		300x80		75	A-M4 A-M3A	
ST-S 630/102-60	6300	5500	800	4	Ø102	Ø60	300x70	150x50	61	A-M3 A-M1	
ST-S 630/133-60					Ø133		300x80		80	A-M4 A-M3A	
ST-S 680/102-60	6800	6000	800	4	Ø102	Ø60	300x70	150x50	65	A-M3 A-M1	
ST-S 680/133-60					Ø133		300x80		85	A-M4 A-M3A	

Copyright © 2014 - All rights reserved ZINCOMETAL S.A.

All rights reserved.

Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.



www.zincometal.gr

Δ. 10ο χλμ. Κιλκίς-Πολυκάστρου
61100 Κιλκίς, τ.θ. 21
AD. 10th km. Kilkis - Polikastro
P.C. 61100 Kilkis, Greece

T. +30 23410 75651-3
+30 23410 71581
F. +30 23410 71734

E. info@zincometal.gr
WEB. www.zincometal.gr

zin
lux
lighting

hellenic griglia